



The
Patent
Office

PCT/GB 00 / 00747

02



2000


15

INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



097936492

REC'D 21 MAR 2000

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 March 2000



MAR 1999

11MAR99 E431677-5 D00291
P01/7700 0.00 - 9905505.5

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference
SAJ/P1126UK

2. Patent application number
(The Patent Office will fill in this part)

9905505.5


3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

B & H (Nottingham) Limited
Grove Works
Lanthwaite Road
Clifton
Nottinghamshire
NG11 8JZ

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

England

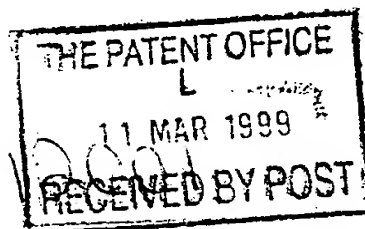

4. Title of the invention

Improvements in Electrical Connectors

5. Name of your agent (*if you have one*)

Lewis & Taylor

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

144 New Walk
Leicester
LE1 7JA

49 Stoney Street.
Nottingham
NG1 1LX (form 20/77).

Patents ADP number (*if you know it*)

711002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 4

Claim(s)

Abstract

Drawing(s) 1 + 1 (2)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature Lewis Taylor Date 10 March 1999

12. Name and daytime telephone number of person to contact in the United Kingdom
Dr S A Jones
0116 233 8181

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Title - Improvements in Electrical Connectors

This invention relates to improvements in electrical connectors, in particular connectors for the mechanical connection or termination of one or more electrical conductors.

5 Electrical connectors comprising a tubular socket into which the end of an electrical conductor is inserted are widely used. Clamping bolts are commonly held in threaded bores in the wall of the socket and are used to fix the conductor to the internal surface of the socket, thereby establishing electrical and mechanical connection between the conductor and the connector.

10 A disadvantage of connectors of this type is that the internal dimensions of the socket (normally the diameter in the case of a socket of circular bore) are fixed. If the conductor inserted into the socket has a diameter substantially less than the internal diameter of the socket then the assembly of socket and conductor will be asymmetrical. This creates increased electrical stress when voltage is applied and can lead to difficulty in achieving effective insulation around the assembly.

15 It is known to utilise socket inserts or shims to make the effective internal dimensions of the socket more suitable for conductors of reduced diameter. However, known forms of socket insert suffer from the disadvantage that they may be difficult to position correctly, may be dislodged and lost prior to use, and/or may interfere with the clamping action of the bolts.

20 There has now been devised an improved form of electrical connector which overcomes or substantially mitigates the above mentioned disadvantages.

According to the invention, an electrical connector comprises a connector body with a tubular socket to receive, in use, an electrical conductor, clamping means arranged to secure the electrical conductor within the socket, and a socket insert fitting within the socket so as to reduce the effective size of the socket, wherein the socket insert is tubular and is adapted to

be deformed by the clamping means into retaining engagement with the electrical conductor.

The connector according to the invention is advantageous primarily in that the socket insert reduces the effective diameter of the socket and hence reduces the eccentricity of the positioning of a small diameter conductor within the socket. This in turn improves the electric field properties of the completed joint and makes it easier to insulate. Apart from the provision of the socket insert, the connector may be of conventional design, enabling the socket insert to be used with readily available connectors. The deformability of the socket insert enables secure retention of the conductor within the connector. The socket insert is also relatively easy to manufacture and use.

- 10 The deformability of the socket insert requires that it be manufactured of a suitably deformable material. A preferred material is aluminium, especially 99.9% pure aluminium.

The deformability of the socket insert may be further enhanced if it is formed with a castellated or corrugated profile. A socket insert of such a form represents a further aspect of the invention, which thus provides a socket insert for an electrical connector having a socket in which, in use, an electrical conductor is received, the socket insert being tubular and deformable, and having a castellated or corrugated profile. In a further aspect, the invention provides an electrical connector including such a socket insert.

- 15 The internal surface of the tubular socket insert may be provided with serrations or tooth-like formations to improve the grip of the socket insert on the electrical conductor and/or to improve the manner in which the socket insert is deformed in use.

The socket is most preferably a bore, most commonly a blind bore, of circular cross-section.

- The clamping means preferably comprises one or more clamping bolts held in threaded bores in the connector body such that they extend into the socket so as to clamp, via the socket insert, a connector inserted therein against the opposing surface of the socket. The bolts may have shearable heads which shear off when the applied torque exceeds a predetermined value.

The invention will now be described in greater detail, by way of illustration only, with reference to the accompanying drawings, in which

Figure 1 is a perspective view of the end of a connector body forming part of an electrical connector according to the invention;

- 5 Figure 2 is an end view of a first embodiment of a socket insert for use with the connector body of Figure 1;

Figure 3 is a cross-sectional view of an assembled connector comprising the connector body of Figure 1 and the socket insert of Figure 2, with an electrical conductor inserted into the socket insert but prior to securing of the conductor;

- 10 Figure 4 is a view similar to Figure 3, but after securing of the conductor within the connector; and

Figure 5 is a cross-sectional view of a second embodiment of a socket insert.

- 15 Referring first to Figure 1, a connector body 10 is formed from aluminium and comprises a tubular socket 12. The portion of the body 10 shown may be formed integrally with one or more similar parts incorporating further similar sockets, eg for end-to-end connection of two conductors. Alternatively, the body 10 may be formed integrally with a fixing flange for termination of the conductor.

- 20 A wall of the body 10 has a threaded bore 14 to receive a shear-head clamping bolt 15 (see Figures 3 and 4). The body 10 may be provided with more than one, eg two, such threaded bores 14.

A large diameter conductor may be inserted directly into the socket 12 and clamped using a bolt 15. For use with smaller diameter conductors, however, the socket insert 20 shown in Figure 2 is used. The insert 20 has the form of an extruded aluminium tube with a corrugated

profile.

The connector may be supplied with the insert 20 in position, in which case a simple resilient C-clip or the like (not shown), eg of plastics material, may be fitted into the open end of the socket 12 to prevent the insert 20 being dislodged prior to use.

- 5 In use, if a relatively large diameter conductor is to be clamped in the socket 12, the insert 20 is removed from the socket 12 and the conductor inserted. The clamping bolt(s) 15 are tightened until they clamp the conductor against the internal surface of the socket 12.

- For a smaller diameter conductor 30 (see Figures 3 and 4), the insert 20 remains in position. The conductor 30 is inserted into the internal bore of the insert 20. The clamping bolt(s) 15 are then tightened until their tips engage and deform the insert 20. Continued tightening of the bolt(s) 15 securely clamps the conductor 30 within the socket 12, the head of each clamping bolt 15 shearing off when a predetermined torque is applied (as shown in Figure 4). The effect of the insert 20 is to displace the longitudinal axis of the conductor 30 closer to the centre line of the connector body 10 than would be the case if no insert were used.
- 15 This improves the electric field properties of the completed connection and makes it easier to insulate. In addition, the same length of clamping bolt 15 can be used as for a larger diameter conductor.

- The socket insert 40 shown in Figure 5 differs from that of Figure 2 in that it is of castellated, rather than corrugated, form. In addition, the internal bore 41 of the insert 40 is formed with a number of axial teeth 42 which enhance the engagement of the insert 40 with a conductor inserted into the bore 41.
- 20
-

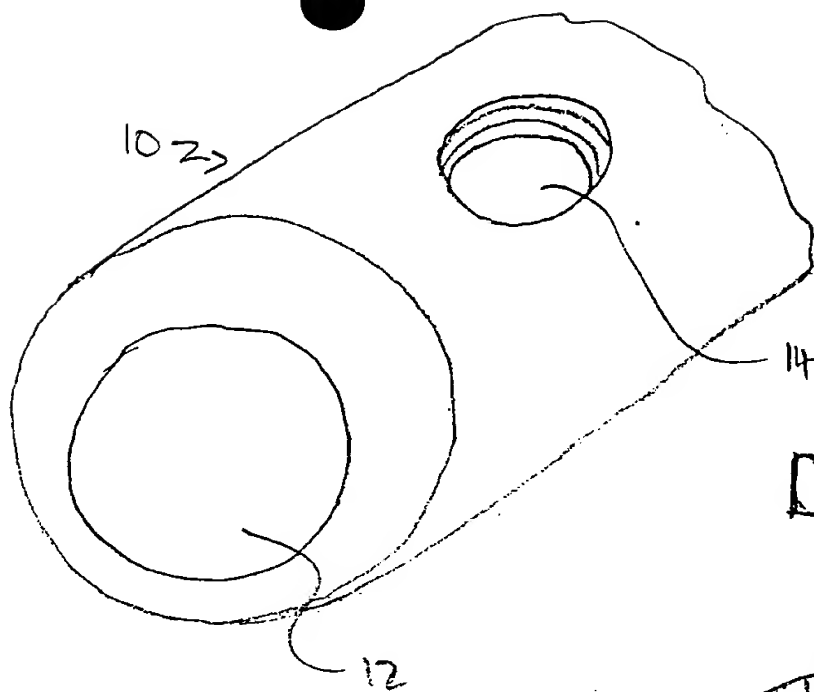


FIG 2

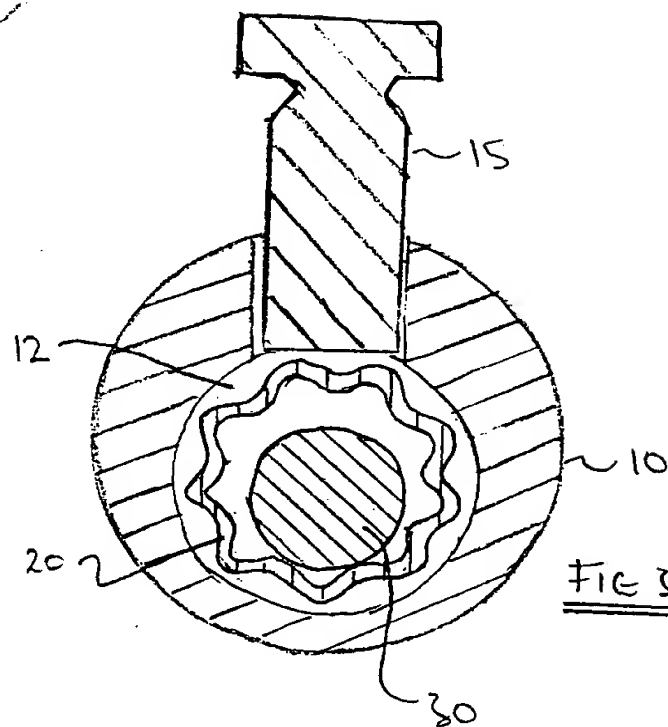
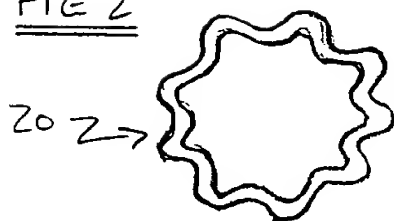


FIG 4

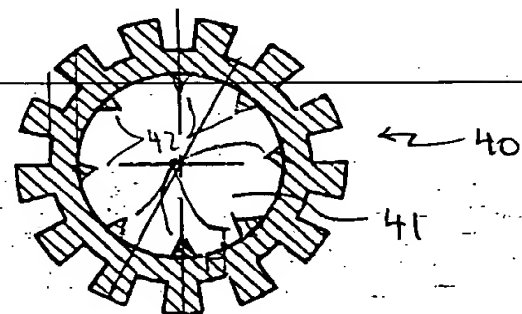
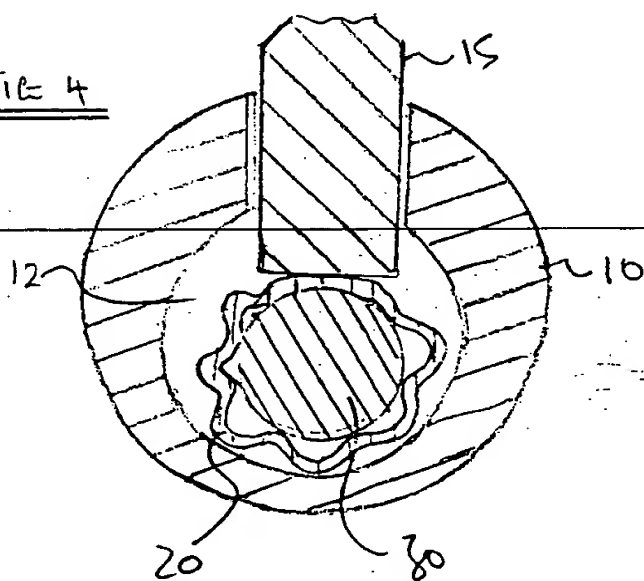


FIG 5

00/0747

2.3.00

Lewis, Taylor

THIS PAGE BLANK (USPTO,
